



LOCKHEED MARTIN
We never forget who we're working for[®]



C-130J Super Hercules
Whatever the Situation, We'll Be There



Table of Contents

INTRODUCTION	1
RECENT CAPABILITY/PERFORMANCE UPGRADES	4
SURVIVABILITY OPTIONS	5
GENERAL ARRANGEMENT	6
GENERAL CHARACTERISTICS	7
TECHNOLOGY IMPROVEMENTS	8
COMPETITIVE COMPARISON	9
CARGO COMPARTMENT	10
CROSS SECTIONS	11
CARGO ARRANGEMENT	12
CAPACITY AND LOADS	13
ENHANCED CARGO HANDLING SYSTEM	15
COMBAT TROOP SEATING	17
Paratroop Seating	18
Litters	19
GROUND SERVICING POINTS	20
GROUND OPERATIONS	21
FLIGHT STATION LAYOUTS	22
Instrument Panel	22
Overhead Panel	23
Center Console	24
USAF AVIONICS CONFIGURATION	25
MAJOR SYSTEMS	26
Electrical	26
Environmental Control System	27
Fuel System	27
Hydraulic Systems	28
Enhanced Cargo Handling System	29
Defensive Systems	29
PERFORMANCE	30
Maximum Effort Takeoff Roll	30
Normal Takeoff Distance (Over 50 Feet)	30
Maximum Effort Landing Roll	31
Normal Landing Distance (Over 50 Feet)	31
Payload Range	32
WORLD RECORDS	33

Introduction

Note: In general this document and its contents refer to the C-130J-30, the stretched/advanced version of the Hercules.



The C-130 Hercules is the standard against which military transport aircraft are measured. Versatility, reliability, and ruggedness make it the military transport of choice for more than 60 nations on six continents. More than 2,300 of these aircraft have been delivered by Lockheed Martin Aeronautics Company since it entered production in 1956. During the past five decades, Lockheed Martin and its subcontractors have upgraded virtually every system, component, and structural part of the aircraft to make it more durable, easier to maintain, and less expensive to operate. In addition to the tactical airlift mission, versions of the C-130 serve as aerial tanker and ground refuelers, weather reconnaissance, command and control, gunships, firefighters, electronic recon, search and rescue, and flying hospitals.

The newest Hercules, the C-130J, has the same rugged good looks of its predecessors, but in fact is a greatly improved airplane with the performance and capability to prove it. Compared to the earlier C-130E, the maximum speed is 21 percent higher,

Introduction

climb time is reduced by up to 50 percent, cruising altitude is up to 40 percent higher, and range is up to 40 percent longer. With new engines and props, the J has set 54 world records for rate of climb, cruise speed, and both distance and altitude with payload.



The C-130J incorporates these major improvements:

- A new propulsion system featuring four 4,591 pshp Rolls-Royce AE2100D3 engines and composite, six-bladed Dowty Aerospace R391 propellers with significantly improved fuel economy and high-hot performance.
- Two-person flight station including four multifunctional LCD displays; two holographic head-up displays (HUD); and electronic, digital readouts for aircraft operating, communicating, and navigating systems. The displays and aircraft general lighting are compatible with the USAF's night-vision imaging system.
- A 1553 data bus, two mission computers, and two backup bus interface units provide dual redundancy for the Hercules' systems. In addition, the computers provide for an integrated diagnostics system that monitors and records the status of the aircraft's structure and systems.

Introduction

The C-130J-30, the stretched/advanced version of the Hercules, offers operators 55 feet of cargo compartment length – an additional 15 feet over the original “short” aircraft. The additional 15 feet is provided by inserting a 100-inch forward and an 80-inch aft plug to the fuselage. This translates into 30 percent more usable volume for increased seating, litters, pallets, or airdrop platforms. This additional capability provides significant advantages when transporting personnel or delivering priority cargo by reducing the number of sorties needed to complete the mission.

In addition to the significant increases in operational capability and performance, the C-130J offers a greater value when compared to any other tactical airlifter: System reliability and maintainability are improved by up to 50 percent; maintenance man-hours per flight hour are decreased by up to 68 percent; and flight and maintenance manpower are reduced by up to 50 percent, resulting in a 47 percent lower squadron operating and support cost.



Recent Capability/Performance Upgrades

Subsequent to the USAF Operational Test and Evaluation Acceptance of the C-130J combat delivery aircraft in 2006, several performance enhancements by Lockheed Martin Aeronautics were developed, tested, verified, qualified, accepted, and incorporated into the basic aircraft configuration. These include:

- Terrain Awareness and Warning System (TAWS), a forward-looking awareness and warning system, for improved in-flight situational awareness. The TAWS operates in conjunction with the existing Ground Collision Avoidance System (GCAS) as independent complementary systems providing visual and obstacle Voice Warning Alerts (VWA) to the crew.
- Identification Friend or Foe (IFF) Transponder Mode S with Enhanced Surveillance for use in civil Communications, Navigation, and Surveillance/Air Traffic Management (CNS/ATM) airspace. The IFF has growth capability to Mode 5.
- Communications, Navigation, and Identification (CNI) common software upgrade developed for all customers including updated chute ballistic tables, new track offset, additional drift down performance pages, and re-host of the Takeoff and Landing Data (TOLD) from the CNI to the Mission Computer (MC).
- TOLD re-hosted in MC Operational Flight Program (OFP), enabling additional and enhanced capabilities pertaining to charts and calculations for hot/high takeoffs, assault landing weight, modified minimum field length maximum effort takeoff, climb gradients, wind corrections, and temperature deviation expansion to ISA +/-45°C.




Recent Capability/Performance Upgrades

- Center Wing Box improvement to provide Enhanced Service Life (ESL) by strengthening structural components such as Hat Sections (stringers), Beam Caps and Webs, Wing Attach Fittings, and Engine Truss Mounts. The ESL wing was originally developed for the USAF Special Operations C-130s in support of Severe Mission Operations.
- Reduced Vertical Separation Minima (RVSM) for worldwide operations in CNS/ATM controlled airspace. Access to RVSM airspace increases true air speed and range while reducing fuel consumption, e.g., enhances long-range cruise performance.
- Data Transfer and Diagnostic System (DTADS) Interface Unit for maintenance management of critical aircraft systems using a Windows Operating System. DTADS encompasses in-flight and post-flight analysis, ground maintenance processing, structural health monitoring, and engine life management. DTADS is scheduled to become available in 2010.

Survivability Options

- Small Arms Armor Kit, available as Customer-Furnished Equipment (CFE), provides protection for the pilot and co-pilot, crew station and bunk, forward and aft loadmaster stations, paratroop doors, nose wheel well, and liquid oxygen converter.
- Explosive Suppressant Tank Foam is available as CFE for the main and auxiliary fuel tanks, which aids in protecting against ballistic penetration and lightning strikes.

General Arrangement

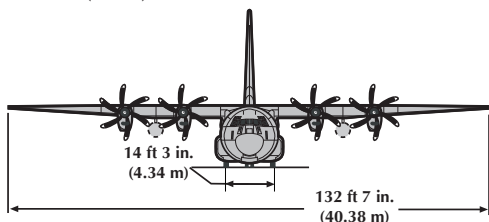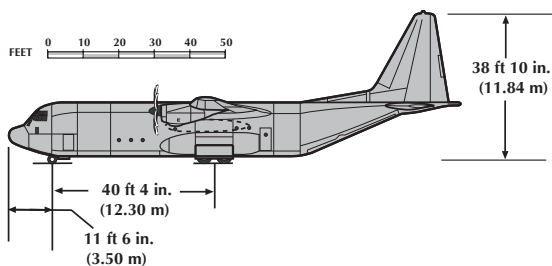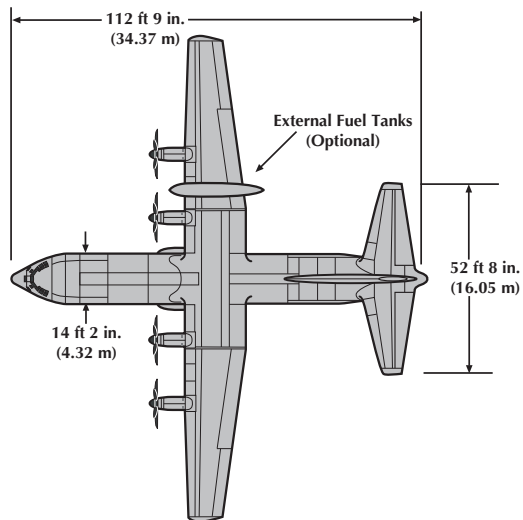

General Characteristics

Dimensions	
Wingspan	132 ft 7 in.
Length	112 ft 9 in.
Height	38 ft 10 in.
Cargo Floor	
Length (Floor + Ramp)	55 ft + 10 ft 8 in.
Width (Minimum)	10 ft
Height (Minimum)	9 ft
Area (Floor + Ramp)	550 + 107 sq ft
Cargo Volume	6,022 cu ft
Weights	
Max Takeoff Weight (2.5g)	164,000 lb
Max Takeoff Weight (2.25g)	175,000 lb
Max Landing Weight, 9 fps	162,000 lb
Max Landing Weight	164,000 lb
Operating Weight Empty	87,667 lb
Max Payload (2.5g) (Note 2)	47,333 lb
Max Fuel (JP-8)	43,562 lb
Max Zero Fuel Weight (Note 1)	129,000 lb
Max Zero Fuel Weight (Note 2)	135,000 lb
Performance	
Max Cruise Speed	355 kts
Airdrop Speed	Up to 250 KIAS
Takeoff Dist Over 50 ft (S/L, ISA, 164,000 lb)	
Normal	5,850 ft
Takeoff Roll (S/L, ISA, 164,000 lb)	
Max Effort	3,100 ft
Landing Dist Over 50 ft (S/L, ISA, 135,000 lb)	
Normal	3,000 ft
Ground Roll (S/L, ISA, 135,000 lb)	
Max Effort	1,630 ft
Max Range (Without Tanks)	3,510 n.mi
Range (40,000-lb Payload – 2.5-g Mission)	2,200 n.mi
Cruising Altitude (T/O at MTOW)	27,000 ft
Service Ceiling (T/O at MTOW)	29,000 ft
Crew	2 Pilots + Loadmaster
Power Plant	
	4 Rolls-Royce AE2100D3, 4,591 pshp Turboprop Engines (4 Dowty R391, 6-Blade Propellers, All Composite)
<i>Note 1: Structural Reserve Fuel</i>	
<i>Note 2: With Wing Bending Relief Fuel</i>	

Technology Improvements



AIRCRAFT

- Two-Person Flight Deck Crew
- Provisions for Auxiliary Crew Member Station
- Ergonomically Designed Cockpit
- Interchangeable Panel Layout
- Soft Panels
- Advanced Communications and Navigation Systems
- New Electrical System
- 1553B Data Bus Architecture
- Integrated Diagnostic System
- Head-Up Display (Dual) – Certified Primary Flight Instrument
- 250 KIAS Airdrop Speed Ramp and Door
- Single Cross-Ship Fuel Manifold
- Defensive Systems
- Air Traffic and Ground Collision Avoidance Systems
- Enhanced Cargo Handling System (USAF Configuration)
- Color Digital Map Display
- Color Weather Radar/Ground Mapping Radar
- Night-Vision Imaging System (NVIS) Compatible (Flight Deck and Cargo Compartment)

PROPULSION


- Rolls-Royce AE2100D3, Flat Rated at 4,591 pshp
- Full-Authority Digital Electronic Control (FADEC)
- Dowty R391 Six-Bladed Composite Propeller

Competitive Comparison


Model	Cargo Floor	#463L Pallets	Litters	CDS Bundles	Combat Troops	Para-troops
C-130J-30	55 ft	8	97	24	128	92
A400M (Proposed)	58 ft	9	66	24	120	120
C-17	65 ft	18	36	40	102	102
C-130E/H C-130J (Short)	40 ft	6	74	16	92	64




Cargo Compartment

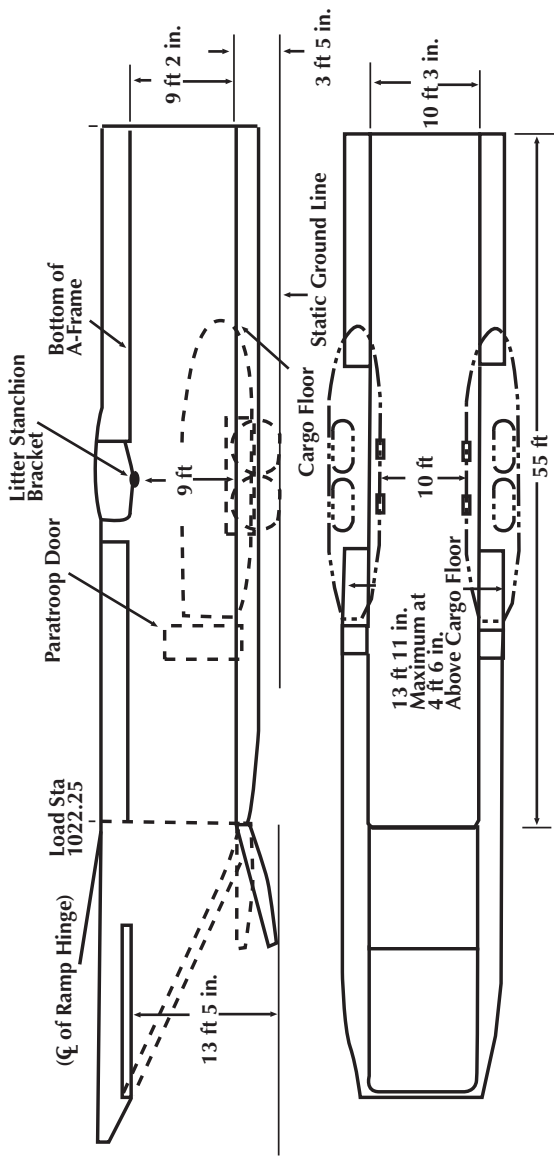

Cross Sections

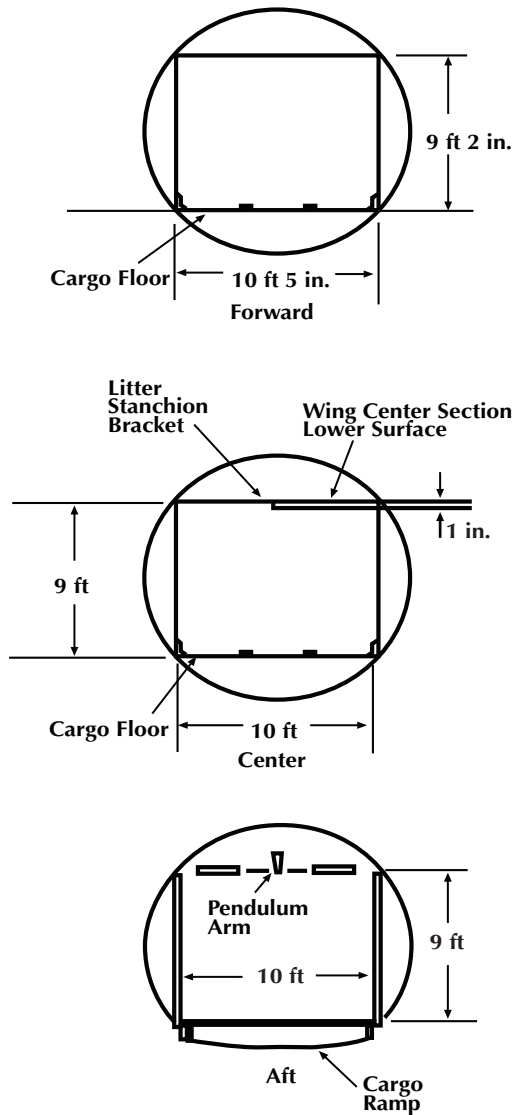

Cargo Arrangement

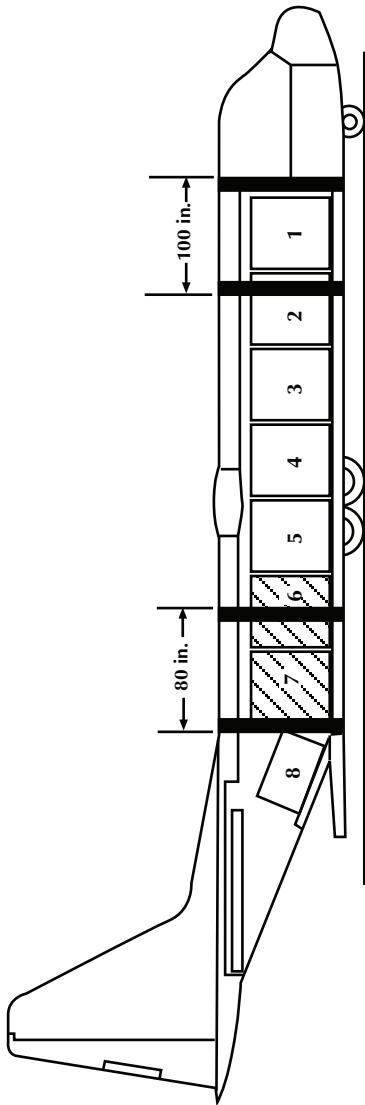

Model	Cargo Floor	#463L Pallets	Litters	CDS Bundles	Combat Troops	Para-troops
C-130J-30	55 ft	8	97	24	128	92

The C-130J-30 Can Carry 90 Percent of the U.S. Army and USAF Combat Equipment

Capacity and Loads

SUMMARY OF CARGO COMPARTMENT CAPACITY AND MAXIMUM ALLOWABLE FLIGHT LOADS

Load Station Centroid	Inch	365	428	517	607	697	787	877	967	1027	1083	1133
Compartment		C	D	E	F	G	H	I	J	K	L	M
Area	sq ft (sq m)	32 (2.98)	76 (7.06)	77 (7.16)	77 (7.16)	75 (6.97)	75 (6.97)	77 (7.16)	76 (7.06)	27 (2.51)	71 (6.60)	15 (1.39)
Volume	cu ft (cu m)	292 (8.17)	684 (19.15)	692 (19.37)	692 (19.37)	678 (18.98)	676 (18.92)	692 (19.37)	684 (19.15)	219 (6.13)	454 (12.71)	73 (2.04)

MAXIMUM LOAD RATE

Maximum Individual Compartment Capacity	lb (kg)	5,700 (2,585)	11,500 (5,216)	21,000 (9,525)	38,000 (17,236)	45,000 (20,412)	45,000 (20,412)	34,000 (15,422)	19,500 (8,845)	3,500 (1,588)	4,500 (2,041)	500 (744)
Concentrated Loads – All Areas	psi (kg sq cm)	50 (3.52)	50 (3.52)	50 (3.52)	50 (3.52)	50 (3.52)	50 (3.52)	50 (3.52)	50 (3.52)	50 (3.52)	50 (3.52)	50 (3.52)
Running Loads per Treadway	lb/ft (kg/m)	1,400 (2,083)	1,400 (2,083)	1,400 (2,083)	3,000 (4,464)	3,000 (4,464)	3,000 (4,464)	1,400 (2,083)	1,400 (2,083)	500 (744)	500 (744)	500 (744)
Running Loads Between Treadways	lb/ft (kg/m)	1,600 (2,381)	1,600 (2,381)	1,600 (2,381)	1,600 (2,381)	1,600 (2,381)	1,600 (2,381)	1,600 (2,381)	1,600 (2,381)	13 (744)	500 (744)	500 (744)
Tongue Load Between Treadways	lb (kg)	2,000 (907)	2,000 (907)	2,000 (907)	2,000 (907)	2,000 (907)	2,000 (907)	2,000 (907)	2,000 (907)	450 (204)	450 (204)	450 (204)
Palletized and Containerized Cargo	lb/ft (kg/m)	5 (4,167)	2,800 (4,167)	2,800 (4,167)	2,800 (4,762)	3,200 (4,762)	2,800 (4,762)	2,800 (4,762)	2,800 (4,167)	5 (4,167)	1,000 (1,488)	5 (1,488)

Capacity and Loads


MAXIMUM AXLE LOAD

Pneumatic Tires, 100 psi (689.5 KPA) Maximum Pressure	Treadways	6,000 (2,722)	6,000 (2,722)	6,000 (2,722)	13,000 (5,897)	13,000 (5,897)	6,000 (2,722)	2,500 (1,134)	2,500 (1,134)
	Between Treadways	5,000 (2,268)	5,000 (2,268)	5,000 (2,268)	5,000 (2,268)	5,000 (2,268)	5,000 (2,268)	1,200 (544)	1,200 (544)
Hard Rubber Tires and Steel Wheels	Treadways	2,300 (1,043)	2,300 (1,043)	2,300 (1,043)	5,000 (2,268)	5,000 (2,268)	2,300 (1,043)	950 (431)	950 (431)
	Between Treadways	2,000 (907)	2,000 (907)	2,000 (907)	2,000 (907)	2,000 (907)	2,000 (907)	450 (204)	450 (204)

14

<p>1 Do not exceed overall airplane restrictions.</p> <p>2 The ramp (load stations 102-3 through 11-41) contains the aft 19 in. (48.26 cm) of compartment K and compartments L and M. The maximum allowable flight load permitted on the ramp is 5,000 lb (2,268 kg) and the load center of gravity must be located at or forward of the ramp centroid (load station 1063).</p> <p>3 Adequate shoring shall be used to contain tongue loads within psi limits.</p> <p>4 4-ft (1.22 m) minimum distance between axles. Total wheeled load not to exceed compartment capacities listed for pallets or containers.</p> <p>5 Palletized or containerized cargo centroids will not fit in these compartments.</p> <p>6 The cargo loading system restraint rail sections 5 and 6 are limited to 8,500 lb (3,856 kg) total weight restraint.</p> <p>7 Axle loads must not be forward of load station 357.</p> <p>8 Maximum cargo height in the cargo compartments is 108 in. (274.3 cm).</p>	<p>9 When roller conveyors are installed, maximum cargo height is reduced 2-5/8 in. (6.7 cm).</p> <p>10 Maximum height of cargo secured to the cargo ramp is 81 in. (205.7 cm) at ramp station 8 and 77 in. (195.5 cm) at ramp station 10. When roller conveyors are installed, maximum cargo height is reduced 2-5/8 in. (6.7 cm). See figure 4-7 for hard rubber tire and steel wheel limitations.</p> <p>11 These allowables are separate and not additive. If both center floor and treadways are loaded, the total load cannot exceed the maximum treadway load.</p> <p>12 3,000 lb/ft (4,464 kg/m) between load station 537 and load station 882.</p> <p>13 1,600 lb/ft (2,381 kg/m) between load station 1011 and load station 1017.</p> <p>14 3,200 lb/ft (4,762 kg/m) between load station 537 and load station 882.</p> <p>15 13,000 lb/ft (5,897 kg/m) between load station 537 and load station 882.</p> <p>16 5,000 lb/ft (2,268 kg/m) between load station 537 and load station 882.</p>
---	--

Enhanced Cargo Handling System

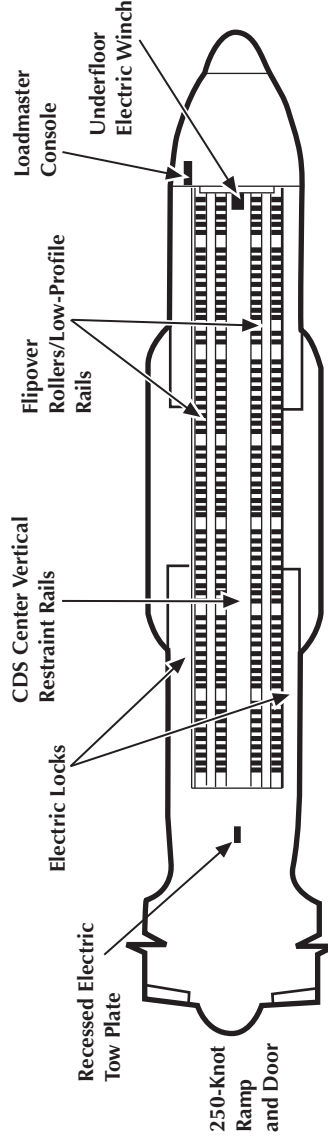


RECONFIGURATION TIME IN MINUTES


Aircraft	Slick Floor to Pallets	Pallets to Slick Floor	Winching	Centerline Vertical Restraint	Tow Plate
C-130E/H C-130J-30 Improvement	15 5 67%	24 5 79%	24 8 67%	10 1 90%	21 1 95%

15

Enhanced Cargo Handling System

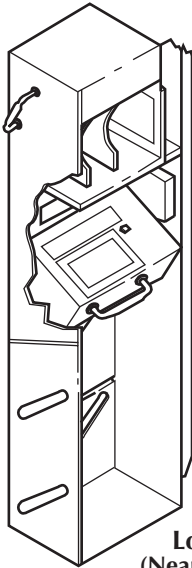


Loadmaster Station
(Near Crew Entrance Door)

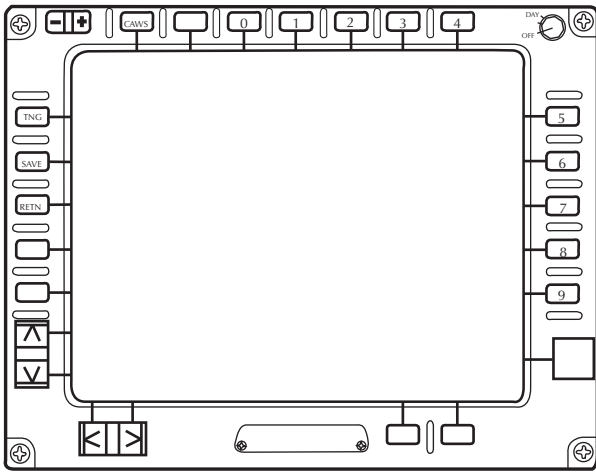


Multifunction Control Display

Combat Troop Seating

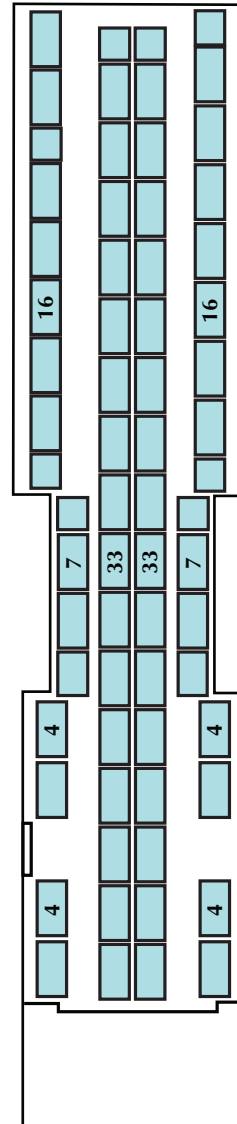

128 Ground Troops
20-Inch Seating


Paratroop Seating

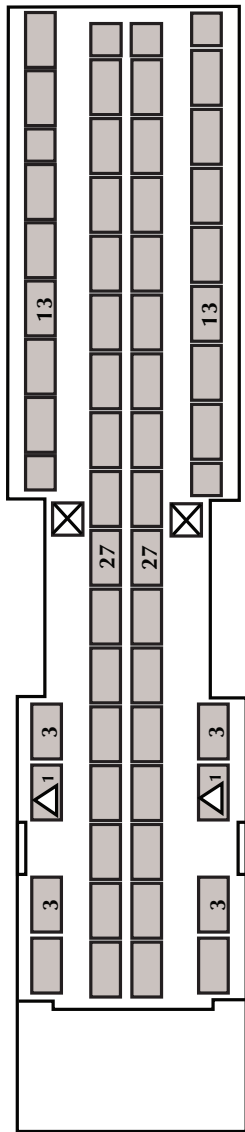

92 Paratroops
24-Inch Seating


△ Loadmaster Seats
⊗ Safety Men

Litters

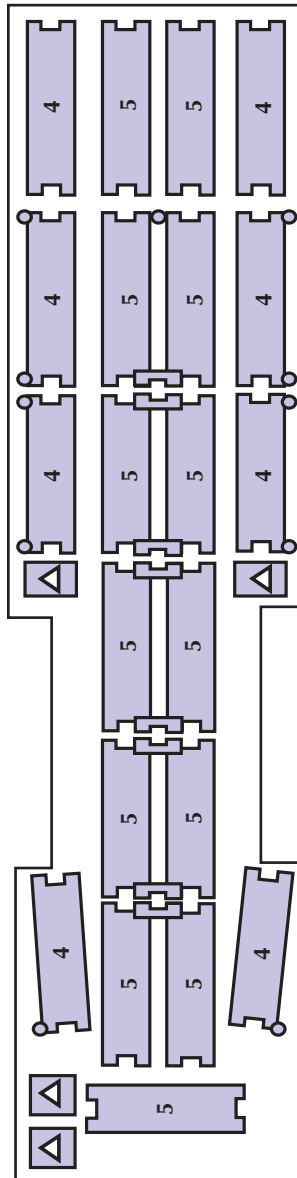


△ Attendants
97 Litters

Ground Servicing Points

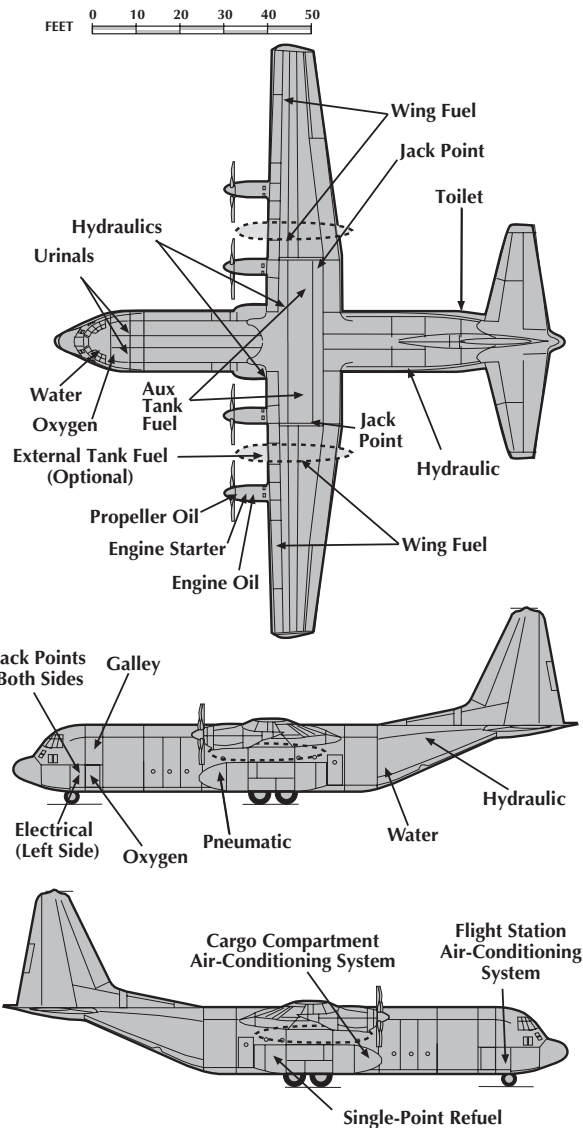


Ground Operations

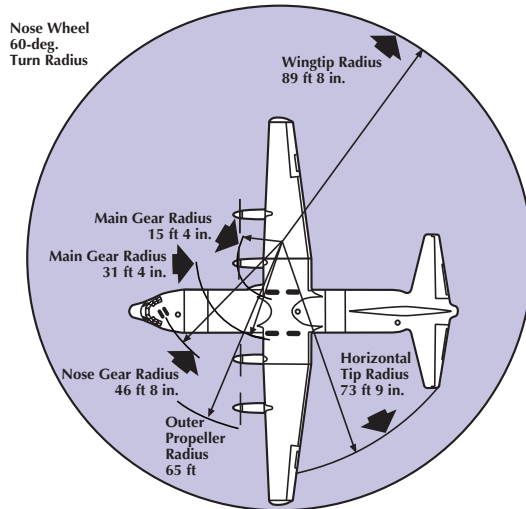

Vertical Clearances

Wingtip	12 ft	Minimum Space Required for Turning is 179 Feet 4 Inches With the Nose Gear Turned to the Maximum of 60 Degrees at Taxi Speeds Under 5 Knots
Vertical Stabilizer Tip	38 ft 10 in.	
Inboard Propeller	6 ft	
Outboard Propeller	6 ft 8 in.	
	6 ft 8 in.	

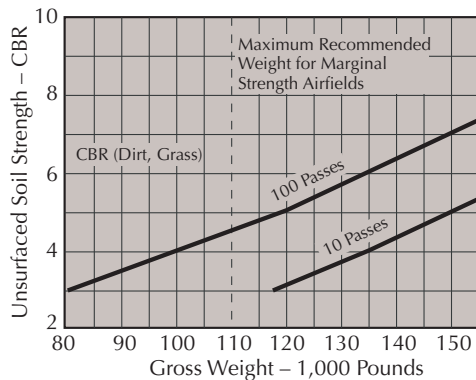


Note

Number of Passes Is Based on Main Landing Gear Tire Inflation Pressure for Marginal Strength Airfields.
A Pass Is Defined as One Landing and One Takeoff.

Flight Station Layouts

Instrument Panel

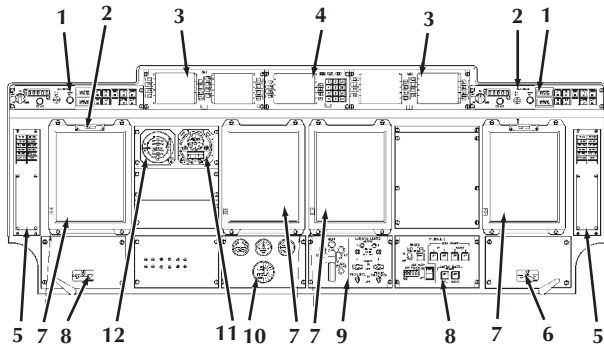


- | | |
|---|--|
| 1 Reference Set/Mode Select Panel (Two Places) | 7 Color Multipurpose Display Unit (CMDU) |
| 2 Inclinometer (Two Places) | 8 Hydraulic Control Panel |
| 3 Avionics Management Unit (Two Places) | 9 Landing Gear/Landing Lights Panel |
| 4 Communication/Navigation/Electronic Circuit Breaker Panel | 10 Flap and Trim Indicator Panel |
| 5 Mode Annunciator Panel (Two Places) | 11 Standby Altimeter/Airspeed Indicator |
| 6 Air Diverter Handle (Two Places) | 12 Standby Attitude Indicator |



Flight Station Layouts


Overhead Panel

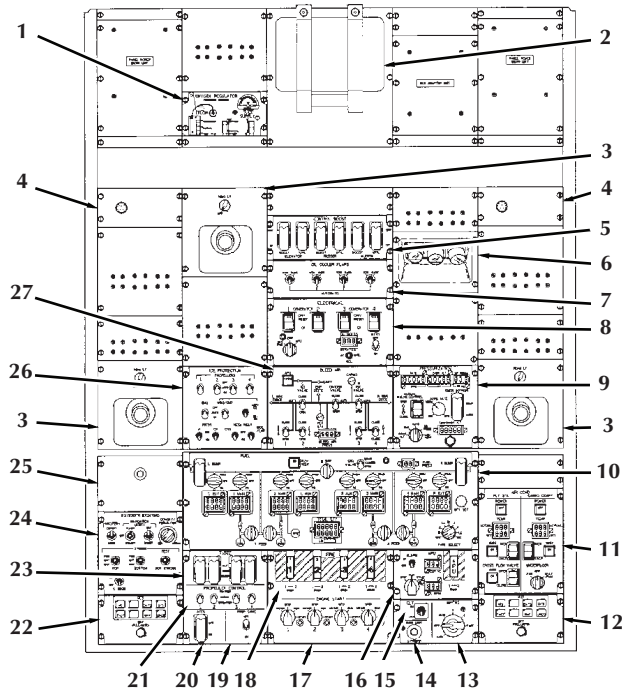

- | | |
|-------------------------------------|------------------------------------|
| 1 Oxygen Regulator | 15 ELT Panel |
| 2 Oxygen Mask Stowage Box | 16 APU Panel |
| 3 Reading Light Control | 17 Engine Start Panel |
| 4 Headset Interface Unit | 18 Fire Panel |
| 5 Control Boost Panel | 19 Prop Sync Panel |
| 6 Console Light | 20 ATCS Panel |
| 7 Oil Cooler Flaps Panel | 21 Propeller Control Panel |
| 8 Electrical Panel | 22 Pilot HUD Panel |
| 9 Pressurization Panel | 23 FADEC Panel |
| 10 Fuel Management Panel | 24 Exterior Lighting Panel |
| 11 Air Cond Panel | 25 Voice Recorder Microphone Panel |
| 12 Co-pilot HUD Panel | 26 Ice Protection Panel |
| 13 Wipers Panel | 27 Bleed Air Panel |
| 14 Emergency Exit Lights Extinguish | |

Flight Station Layouts

Center Console

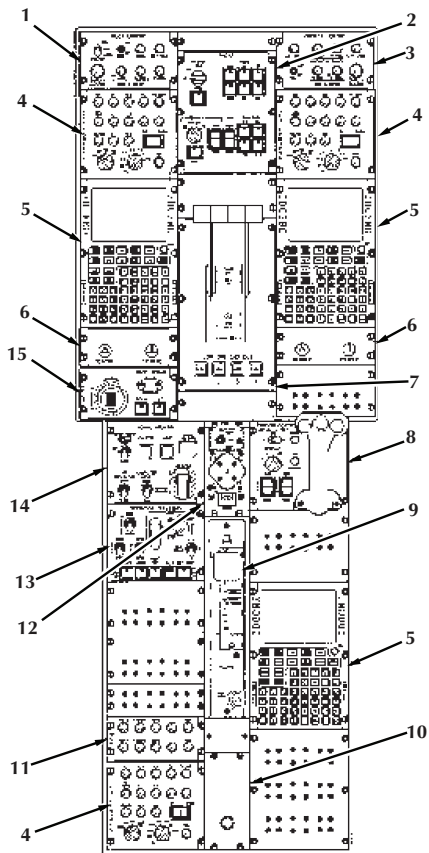

- | | |
|--|---|
| 1 Pilot Lighting Panel | 9 Wing-Flaps Control Quadrant Panel |
| 2 Radar Control Panel | 10 Headset Interface Unit Panel |
| 3 Co-pilot Lighting Panel | 11 Intercommunications System Monitor Panel |
| 4 Intercommunications System Control Panel (Three Places) | 12 Trim Panel |
| 5 Communication/Navigation/Identification Management Unit (Three Places) | 13 Defensive Systems Panel |
| 6 Remote Heading and Course Selector (Two Places) | 14 Aerial Delivery Panel |
| 7 Throttle Quadrant Assembly | 15 Automatic Flight Control System Panel |
| 8 Cursor Control Panel | |

USAF Avionics Configuration

	Qty
Color Multipurpose Display Unit (CMDU)	4
Head-Up Display (HUD)	2
Global Digital Map Unit (GDMU)	1
Mission Computer	2
Avionic Management Unit (AMU)	2
Comm/Nav/Breaker Panel	1
Multichannel Dimming Unit	3
VHF AM/FM Comm Radio, AN/ARC-222 (MXF-626)	2
UHF Communication Radio, AN/ARC-164	2
HF Communication Radio, AN/ARC-190	2
HF Secure Voice, KYV-5 (ANDVT) (Group A)	2
VHF/UHF Secure Voice, KY-58 (Group A)	4
SATCOM (Group A)	1
UHF Satellite Terminal System (USTS) (Group A)	1
Intercommunication System	1
Embedded Global Positioning System/INS (EGI)	2
CNI-System Processor	2
CNI-Management Unit	3
Low-Power Color Radar, APN-241	1
Formation Station Keeping Equipment, SKE 2000	1
Distributed Air Data System	1
Radar Altimeter, HG9550	2
Tactical Air Navigation, AN/ARN-153	2
VHF Omnidirectional Range/Instrument Landing System/Marker Beacon, AN/ARN-147 (One Marker Beacon)	2
Automatic Direction Finder, AN/ARN-149	2
UHF Direction Finder, DF-301E	1
Identification Friend or Foe, APX-119	1
Group A Provisions for 2nd IFF	1
Terrain Awareness and Warning System	1
Group A Provisions for Second Enhanced Traffic Alert and Collision Avoidance Subsystem	1
Digital Autopilot/Flight Director	2
Missile Warning System, AN/AAR-47 (Group A)	1
Countermeasures Dispensing System, AN/ALE-47 (Group A)	1
Radar Warning Receiver, AN/ALR-56M (Group A)	1
Ground Proximity Warning System	1
Integrated Precision Radar Approach System	1

ELECTRICAL

- The electrical system includes four regulated transformer rectifier units, five AC generators, controls, and conversion equipment needed to satisfy and control the diversified power requirements of the various electrical and electronic equipment and other systems. Secondary distribution uses electronic and electromechanical circuit breakers.
- Four 40/50-kVA oil-cooled, three-phase AC generators constitute the primary AC power source. Each engine-driven generator has an overtorque shaft disconnect and an individual generator control unit. A fifth 40/50-kVA air-cooled, three-phase AC generator is mounted on the auxiliary power unit as an additional AC power source.
- Two 24-volt, 42-ampere-hour (beginning of life), sealed, lead acid, and maintenance-free batteries are installed in a battery compartment in the lower left forward fuselage. A control switch in the flight station disconnects the batteries from the electrical system. With fully charged batteries, sufficient battery power is available to operate standby instruments and other flight-critical components for approximately 30 minutes after complete loss of primary aircraft power. When required, one battery can provide electrical power for APU starting.
- Four regulated 200-ampere transformer rectifiers convert AC power to DC power. Two 1-kVA inverters provide uninterruptable electrical power for the essential avionics bus and the main avionics bus.
- Regulated power supplies (RPSs) provide filtered and regulated DC power to the flight station consoles. The RPS is powered by two independent 28-VDC power sources.

ENVIRONMENTAL CONTROL SYSTEM

- The aircraft's environmental control system (ECS) is capable of stabilizing the cockpit environment from a heat soak temperature condition at external ambient temperature of +120°F (+49°C) to +84°F (+28.8°C) within 30 minutes from cooling operation ECS start. The ECS is capable of increasing the cabin average temperature from -22°F (-30°C) to +41°F (+5°C) within 20 minutes.
- Cargo-floor heating is accomplished by using hot air circulating through an underfloor manifold.
- A forced-air cooling system is provided for the flight-station displays and certain rack-mounted avionics and electrical equipment.
- A system for pressurizing the flight station and cargo compartment is supplied by engine compressor bleed air. This electronically controlled pneumatic system is capable of maintaining a maximum of 8,000-foot cabin altitude at 32,200-foot flight altitude. The aircraft is pressurized and depressurized in accordance with a preprogrammed schedule and under rate control while in the automatic mode. A separate backup manual control of the pressurization system provides outflow valve operation in case of a failure in the automatic system.

FUEL SYSTEM

- The fuel system uses a common cross-ship manifold that serves as a refueling system, a fuel supply crossfeed, a direct feed system, a ground defueling system, and a fuel jettisoning system. The fuel system consists of tanks, pumps, piping, valves, flowmeters, strainers, and quantity gage units.
- Fuel system design and performance is based on the use of fuel conforming to JP-8 (MIL-T-83133).
- The system is compatible with JP-4, JP-5, Jet A, Jet A-1, and Jet B fuels with or without anti-icing

Major Systems

additive. Deviations and flight restrictions are required for use of some fuels other than JP-8.

- Group A provisions are provided on the lower side of each outer wing at outer-wing station 81.0 for optional installation of pylons and tanks. When the tanks/pylons are installed, each tank has a usable fuel capacity of 1,379 U.S. gallons (9,377 pounds or 18,754 pounds per aircraft).
- The aircraft has the capability for single-point refueling (SPR) which is integrated into the fuel management system and controlled via the fuel management panel. Refueling quantities can be set for each tank. A manual over-the-wing fuel-filler cap is installed in each main tank.
- Defueling normally is through the ground single-point refueling system using the fuel boost and dump pumps to supply pressure. Defuel quantities can be set for each tank at the fuel management panel.
- Fuel dump controls are located on the fuel management panel located in the flight station.
- Receiver P31 provisions are available for aerial refueling.
- Tanker P31 provisions are included.

HYDRAULIC SYSTEMS

- Three separate hydraulic systems are controlled by engine-mounted or electrically driven pumps. The pumps for the booster system are mounted on engines three and four, and the pumps for the utility system are mounted on engines one and two. The auxiliary system is powered by an electrically driven pump located in the aft fuselage. Normal operating pressure is 3,000 pounds per square inch.
- The booster system operates one-half of each control surface actuator.
- The utility system operates the landing gear (including doors and steering), wing flaps, wheel brakes, and one-half of each control surface actuator.

Major Systems

- The auxiliary system furnishes hydraulic power for normal ramp and cargo door operation. The system also provides pressure for wheel brake operation, NLG extension, and down lock in the event of utility system failure.

ENHANCED CARGO HANDLING SYSTEM (ECHS)

- The ECHS allows the load-crew to control all aspects of logistic and airdrop operations by providing computer-controlled event sequencing of all onload, offload, airdrop, and emergency functions from a single location. The multifunction control/display, located at the loadmaster position, provides control and display of all ECHS functions. The aircraft is capable of performing aerial delivery missions using manual, computer, or combined computer- and manual-controlled modes.


DEFENSIVE SYSTEMS

- Missile Warning System, AN/AAR-47
- Countermeasures Dispensing System, AN/ALE-47
- Radar Warning Receiver, AN/ALR-56M




Performance

MAXIMUM EFFORT TAKEOFF ROLL (Standard Day)

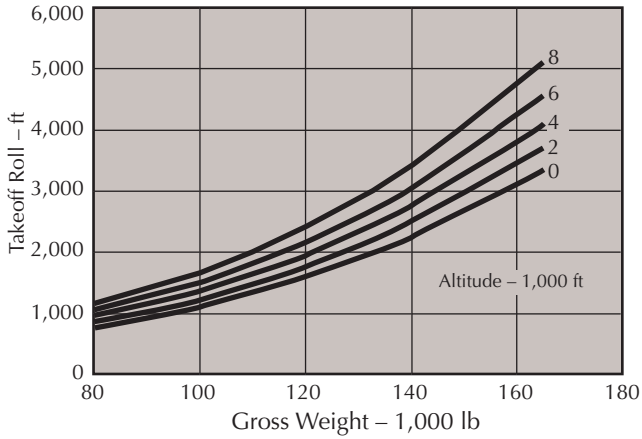


NORMAL TAKEOFF DISTANCE (Over 50 Feet) Takeoff Distance Over 50-Foot Obstacle (Four Engines/50 Percent Flaps/Standard Day)

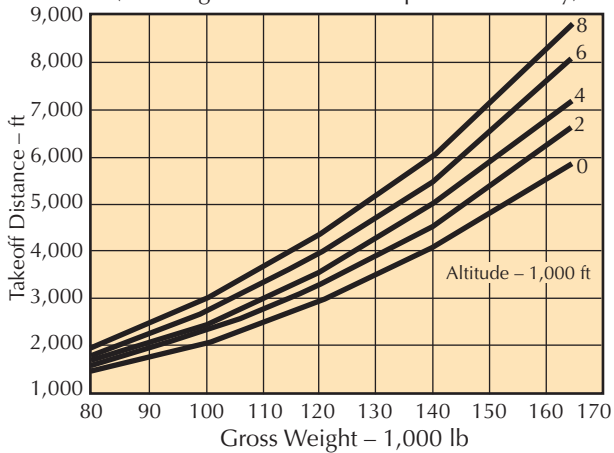


Performance

MAXIMUM EFFORT LANDING ROLL (Four Engines/100 Percent Flaps/Standard Day)

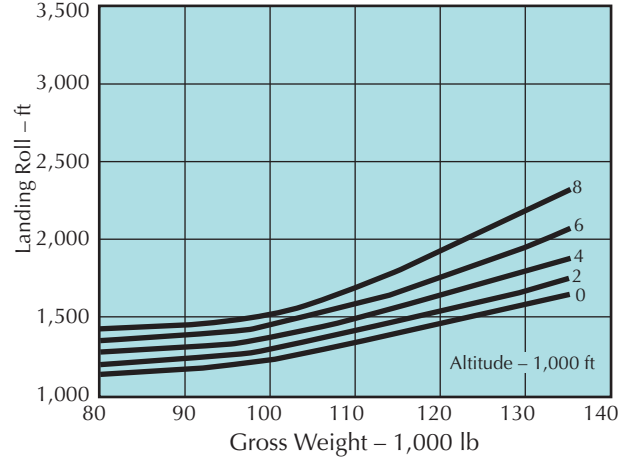


NORMAL LANDING DISTANCE (Over 50 Feet) Landing Distance (Over 50 ft) - ft (100 Percent Flaps/Standard Day)

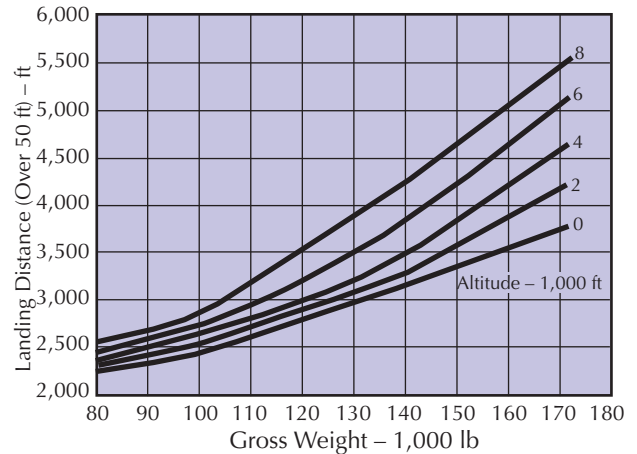

Performance

PAYLOAD RANGE

Standard Day, MIL-C-5011A Reserves (Foam in Tanks)

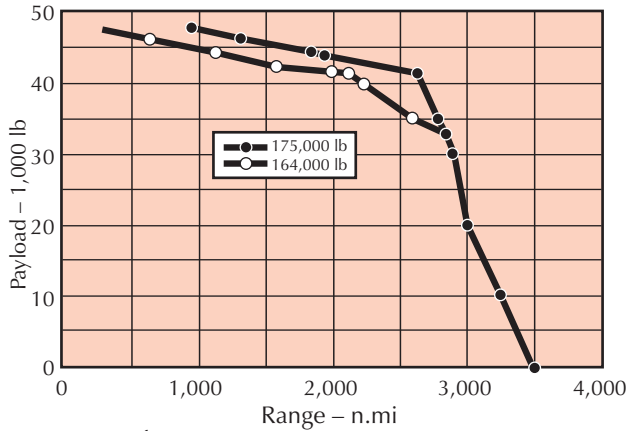

USAF Configuration
Wing Relief Fuel



World Records

54 WORLD RECORDS

All in production-standard,
unmodified aircraft

These flights demonstrate that the C-130J can:

- Carry a useful payload quickly over typical mission distance.
- Get in and out of short fields quickly and carry useful payload.
- Quickly climb to altitude with a significant payload.
- Be flown a strategic distance quickly without external tanks or stopping to refuel.

LOCKHEED MARTIN C-130J CLAIMS 54 WORLD RECORDS

The following records have been certified as world records:

Class C-1.N Turboprop, Group II, Heavy Airplanes
(132,276 to 176,368 lb)

Records broken	15
Records set	6
Total	21

Closed Circuit (Speed and Distance)

NEW RECORD USA, 396.17 mph; Lockheed Martin C-130J, 4/20/99

Breaks old record by 8 percent while carrying twice the payload

BREAKS these existing records:
1,000 km speed with following payloads: 0 kg; 1,000 kg; 2,000 kg; 5,000 kg; 10,000 kg

World Records

ESTABLISHES these records:
1,000 km speed with 15,000 and
20,000 kg payloads

NEW RECORD USA, 394.87 mph; Lockheed Martin
C-130J, 4/20/99

Breaks old record by 16 percent
while carrying twice the payload

BREAKS these existing records:
2,000 km speed with following
payloads: 0 kg; 1,000 kg; 2,000 kg;
5,000 kg; 10,000 kg

ESTABLISHES these records:
2,000 km speed with 15,000
and 20,000 kg payloads

Altitude

NEW RECORD USA, 36,560 feet; Lockheed Martin
C-130J, 4/20/99

Breaks old record by 18 percent
while carrying twice the payload

BREAKS these existing records:
Altitude with following payloads:
0 kg; 1,000 kg; 2,000 kg; 5,000 kg;
10,000 kg

ESTABLISHES these records: Altitude
with 15,000 and 10,000 kg payloads

The following short takeoff and landing (STOL)
records have been certified as U.S. national records.

STOL Aircraft, Class N, Group II, Turboprop

Records broken	1
Records set	<u>28</u>
Total	29

World Records

Closed Circuit

NEW RECORD USA, 371.6 mph; Lockheed Martin
C-130J, 5/14/99

ESTABLISHES these records:
1,000 km speed with following
payloads: 0 kg; 1,000 kg; 2,000 kg;
5,000 kg; 10,000 kg

NEW RECORD USA, 371.96 mph, Arlen Rens (pilot),
Lyle Schaefer (co-pilot),
Lockheed Martin C-130J, 5/14/99

ESTABLISHES these records:
2,000 km speed with following
payloads: 0 kg; 1,000 kg; 2,000 kg;
5,000 kg; 10,000 kg

NEW RECORD USA, 22,300 lb; Lockheed Martin
C-130J, 5/14/99

BREAKS this existing record:
Greatest load to 2,000 meters

NEW RECORD USA, 40,386 feet; Lockheed Martin
C-130J, 5/14/99

ESTABLISHES these records:
Absolute altitude with following
payloads: 0 kg; 1,000 kg; 2,000 kg;
5,000 kg; 10,000 kg

NEW RECORD USA, 39,052 feet; Lockheed Martin
C-130J, 5/14/99

ESTABLISHES this record:
Greatest altitude in horizontal
flight (Note: Must hold this altitude
for a minimum of 90 seconds)

Time-to-Climb

NEW RECORD USA, 3 min 49 sec; Lockheed Martin
C-130J, 5/14/99

World Records

ESTABLISHES these records:
To 3,000 meters with following
payloads: 1,000 kg; 2,000 kg;
5,000 kg; 10,000 kg

NEW RECORD USA, 8 min 0 sec; Lockheed Martin
C-130J, 5/14/99

ESTABLISHES these records:
Time-to-climb to 6,000 meters
with following payloads: 1,000 kg;
2,000 kg; 5,000 kg; 10,000 kg

NEW RECORD USA, 15 min 12 sec;
Lockheed Martin C-130J, 5/14/99

ESTABLISHES these records:
Time-to-climb to 9,000 meters
with following payloads: 1,000 kg;
2,000 kg; 5,000 kg; 10,000 kg

Speed Over a Recognized Course

NEW RECORD USA, 413.99 mph; Lockheed Martin
C-130J, 12/7-8/99

ESTABLISHES these records:
Speed over a recognized course,
unlimited class; speed over a
recognized course, class C-1.N
Duration: 10 hours 58 minutes
14 seconds

NEW RECORD USA, 417 mph; Lockheed Martin
C-130J, 2/12-13/00

ESTABLISHES these records:
Speed over a recognized course
with 34,000 pounds of payload,
unlimited class; speed over a
recognized course with 34,000
pounds of payload, class C-1.N
Duration: 9 hours 31 minutes



The information provided herein represents the opinions of Lockheed Martin Aeronautics Company. It does not constitute an offer to sell and is not warranted or guaranteed. Specifications and performance of individual aircraft may vary and will be governed by the terms and conditions of other documents. Lockheed Martin Aeronautics Company is not responsible for the accuracy or reliability of any opinion, advice or statement made herein and will not be liable for any damages of any kind, in any way relating to this information or its use.



Lockheed Martin Aeronautics Company
Marietta, Georgia

Lockheed Martin
Aeronautics Company
Dept. 002H, MZ 0264
86 South Cobb Drive
Marietta, GA 30063-0264
www.lockheedmartin.com

A12-37957A001